

The reproduction, distribution and utilization of this document as well as the communication of its contents to others without explicit authorization is prohibited.

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich erlaubt.

PA/FF Transmitter Stratos® Pro Type A22.X... or A23.X... (intrinsically safe apparatus)

IECEX IECEx KEM 08.0020 ATEX KEMA 08 ATEX 0100

FISCO field device FISCO field device
 Ex ia IIC T6...T4 Ga II 1G Ex ia IIC T6...T4 Ga
 Ex ib [ia Ga] IIC T6...T4 Gb II 2(1)G Ex ib [ia Ga] IIC T6...T4 Gb
 Ex ic [ia Ga] IIC T6...T4 Gc II 3(1)G Ex ic [ia Ga] IIC T6...T4 Gc
 Ex ib [ia Da] IIIC T80°C Db II 2(1)D Ex ib [ia Da] IIIC T80°C Db

Ambient temperature
 - for gas, T6, T5: -20 °C ≤ Ta ≤ +50 °C
 - for gas, T4...T1: -20 °C ≤ Ta ≤ +65 °C
 - for dust: -20 °C ≤ Ta ≤ +65 °C

Hazardous Classified Area

Unclassified Area



Associated Apparatus

RS 485 (InduCon/Memosens) Terminals 1, 2, 3, 4

MK interface ST 15

Terminals 5, 6 not connected

Terminals 13, 14, 15, 16, 17 18 not connected

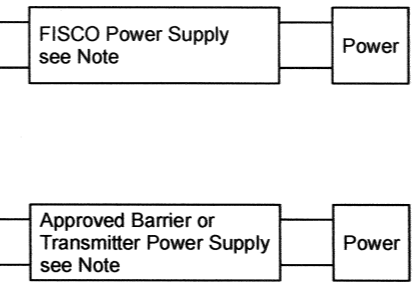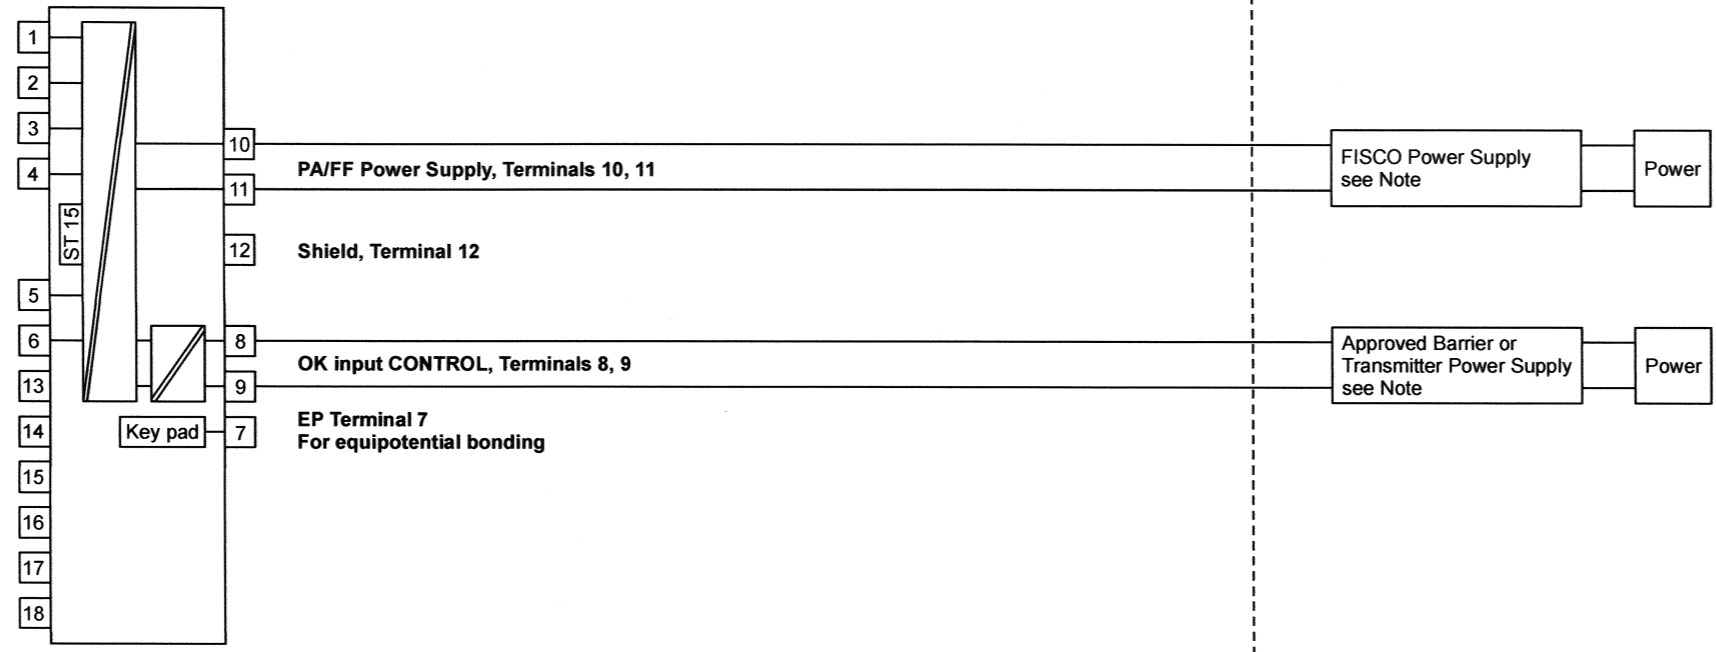

In type of protection intrinsic safety Ex ia IIC only for connection to intrinsically safe circuits, with the following maximum values											
	Ui, Vmax (V)	Ii, Imax (mA)	Pi, Pmax (W)	Ci (nF)	Li (µH)						
PA/FF Power Supply (Terminals 10, 11)	17.5	380	5.32	5	10						
OK input CONTROL (Terminals 8, 9)	30	100	1	0	0						
In type of protection intrinsic safety Ex ic IIC only for connection to intrinsically safe circuits, with the following maximum values											
	Ui, Vmax (V)	Ii, Imax (mA)	Pi, Pmax (W)	Ci (nF)	Li (µH)						
PA/FF Power Supply (Terminals 10, 11)	17.5	570	No Restriction	5	10						
OK input CONTROL (Terminals 8, 9)	30	100	1	0	0						
In type of protection intrinsic safety Ex ia with the following maximum values											
	Uo, Voc (V)	Io, Isc (mA)	Po (mW)	Co, Ca (µF)	Lo, La (mH)	Co, Ca (µF)	Lo, La (mH)	Co, Ca (µF)	Lo, La (mH)	Ci (µF)	Li (µH)
RS 485 (InduCon/Memosens) (Terminals 1, 2, 3, 4) Linear characteristic	5	124	155	83.2	2	1000	8.5	1000	16	10.7	1.2
MK interface	only for connection to a measuring module MK-..., belonging to Stratos® Pro Type A... system										
EP (Terminal 7)	For equipotential bonding										
Shield (Terminal 12)	For PA/FF shield										

WARNING - SUBSTITUTION OF COMPONENTS MAY IMPAIR INTRINSIC SAFETY
 WARNING - DO NOT SEPARATE MODULE WHEN ENERGIZED

- Notes
- Control equipment connected to the associated apparatus must not use or generate more than 250 V.
 - At the time of installation mark the selected type of protection on the equipment marking.

Simultaneous connection of a measuring module MK-... and an InduCon/Memosens measuring system is not permitted.

IS Safe galvanic isolation up to 60 V

Zul. Abweichungen für Maße ohne Toleranzangabe				Maßstab	
Datum				Halbzeug	
Name				Benennung	
Bearb.	28.05.2008	dam	Statos® Pro A22.X..., A23.X... Control Drawing		
Gepr. (KB)	23.04.21	<i>[Signature]</i>	Zeichnungsnummer		
Freigabe	23.04.21	<i>[Signature]</i>	212.002-100		
Schutzvermerk nach ISO16016 beachten.				Blatt	
01 Normen-Update				7	
Nr. Änderungen				Bl.	
Datum				Bl.	
Bearb. Freigabe				Bl.	
Elektronische Messgeräte GmbH & Co. KG					